

Stenhøj MH 2.40 F

Stenhøj MH 2.40 F

2-post hydraulic lifts

STENHØJ MH 2.40 F lifts are especially suitable for all kinds of repairs that require free access to underbody and wheels. The MH 2.40 F has a lifting capacity of 4 t.

As always safety is top priority. That is why the lift is equipped with the following features:

- Automatic protection against overloading.
- Automatic stop in the highest position.
- Automatic activation of the locking mechanism.
- Dead man's control for lifting and lowering.
- Automatic locking of lifting arms in all positions to prevent sliding.
- A control valve is built into each cylinder to control lowering speed in case of pipe failure.




STENHØJ
lifting the level

MH 2.40 F is equipped with F- pads - adjustable from 115 to 145 mm.



An upper limit bar prevents the vehicle from being lifted too high.

We offer a large program of both U and flex pads for this lift.

Stenhøj MH 2.40 F

Technical data

Lifting capacity	4000 kg
Lifting/lowering time	50 sec.
Motor	2.2 kW, Voltage: 220/400/3/50

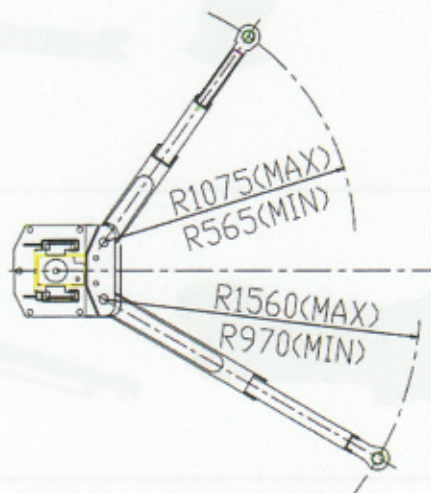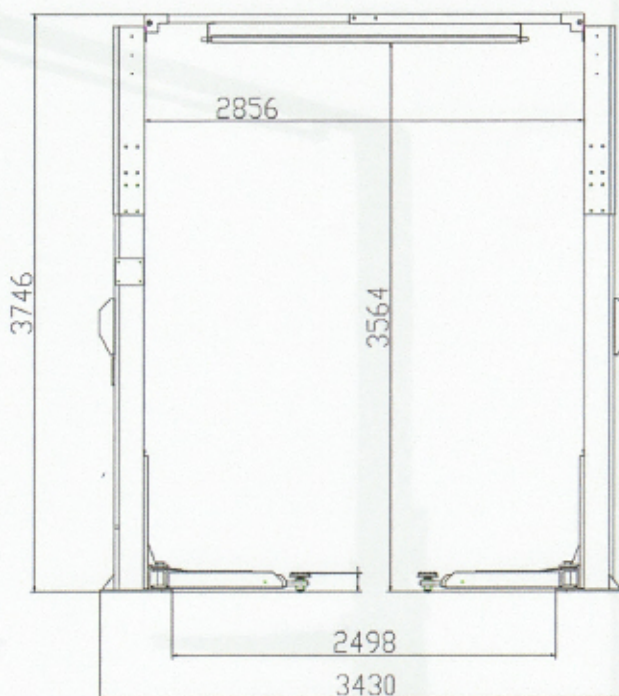

STENHØJ
lifting the level

Stenhøj Autolift A/S
Denmark

Tel: +45 76 82 13 30
Fax: +45 76 82 13 31
Mail: autolift@stenhoj.dk
Web: www.stenhoj.dk

Standard colours

Red RAL 3013
White RAL 9002

No liability accepted for
specifications, which are subject to
alteration