


ULTIMATE UL-4500E ▶ 4.5-tonne 4-Post Hoist with 2x 2T Jacking Beams



Specifications

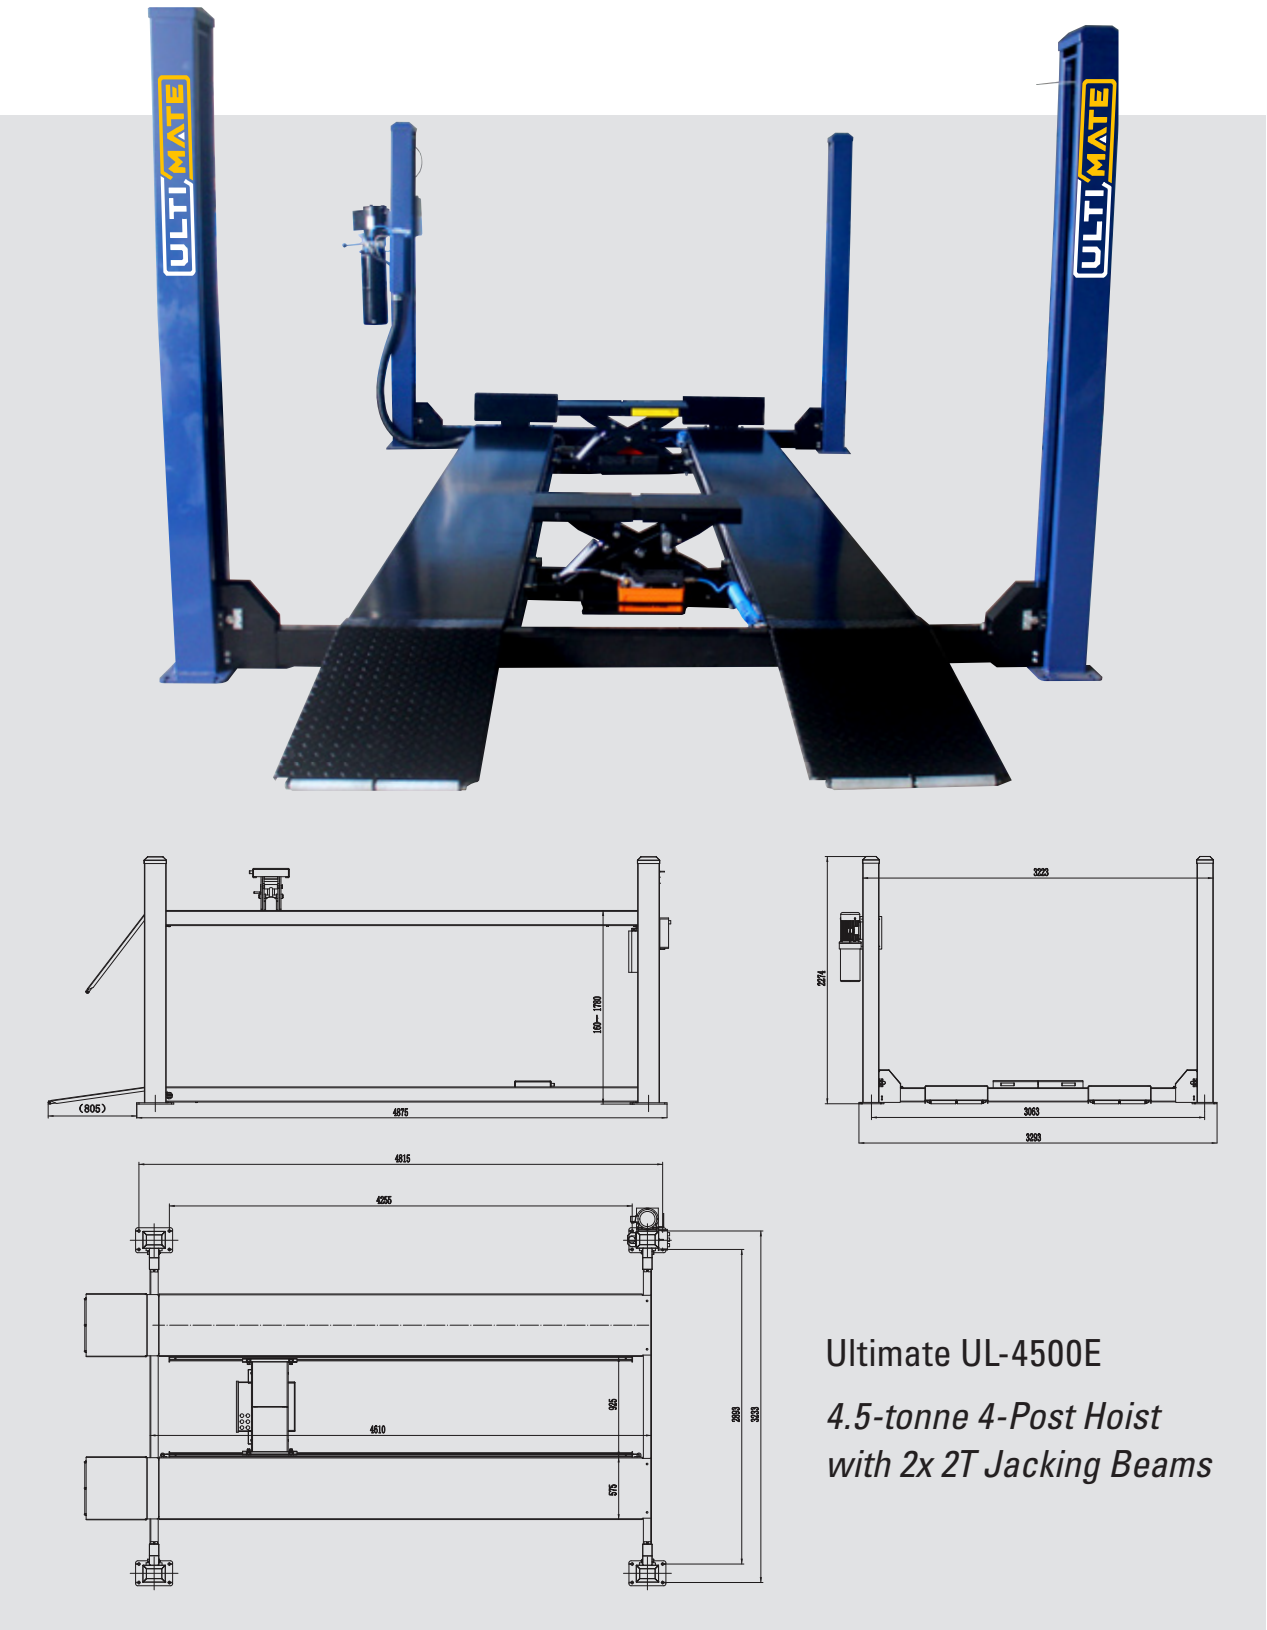

Height Overall	2274mm
Width Overall	3643mm (with power unit)
Platform Length	4610mm
Length Overall (incl ramps)	5650mm
Lifting Height	160–1780mm
Lifting Capacity	4500kg
Power	240V/50Hz/1Ph (15 Amp) or 415V/50Hz/3Ph (20 Amp)
Air Supply	60–90 PSI
Net Weight	1224kg
Gross Weight	1240kg



EU Test Standard




DYNAMIC TEST



Steel Core Wire Rope



Japanese/Italian Oil Seals



Solid Steel X Construction



Aluminium Alloy Shell & Copper Core Motor

The Ultimate UL-4500E is the result of over 40 years of experience supplying and servicing hoists across Western Australia, designed and refined from the ground up to meet the demands of busy Australian workshops.

Built for reliability and safety, the UL-4500E combines a 4.5-tonne lifting capacity with extra-long 4.6m platforms, accommodating everything from small passenger cars to larger utilities and SUVs.

Engineered to endure, it features steel-core wire ropes, solid steel X-construction, and

Japanese/Italian oil seals for long-term performance and minimal maintenance.

Tested to 150% static and 115% dynamic EU standards, and equipped with twin 2-tonne jacking beams for wheels-free operation, the UL-4500E is a dependable all-rounder. Optional alignment kits and

single or three-phase power configurations allow you to tailor it perfectly to your workshop setup.

WorkSafe design-registered and compliant with Australian Standards, the UL-4500E delivers the reliability and peace of mind that only decades of industry experience can produce.



**P & M AUTOMOTIVE EQUIPMENT
SALES & SERVICE**

Unit 5/75 Kelvin Road, Maddington WA 6109
Phone: **+61 8 9209 1044**
Email: **sales@pmautoeq.com.au**